



SECTION A-A
(TYPICAL 3-LANE, 1-WAY WITH SHOULDERS)

* The 4.5 m (15') dimension should be adjusted to 3.6 m (12') min. to 5.5 m (18') max. when placed adjacent to existing pcc pavement structure so that the joints are in prolongation.

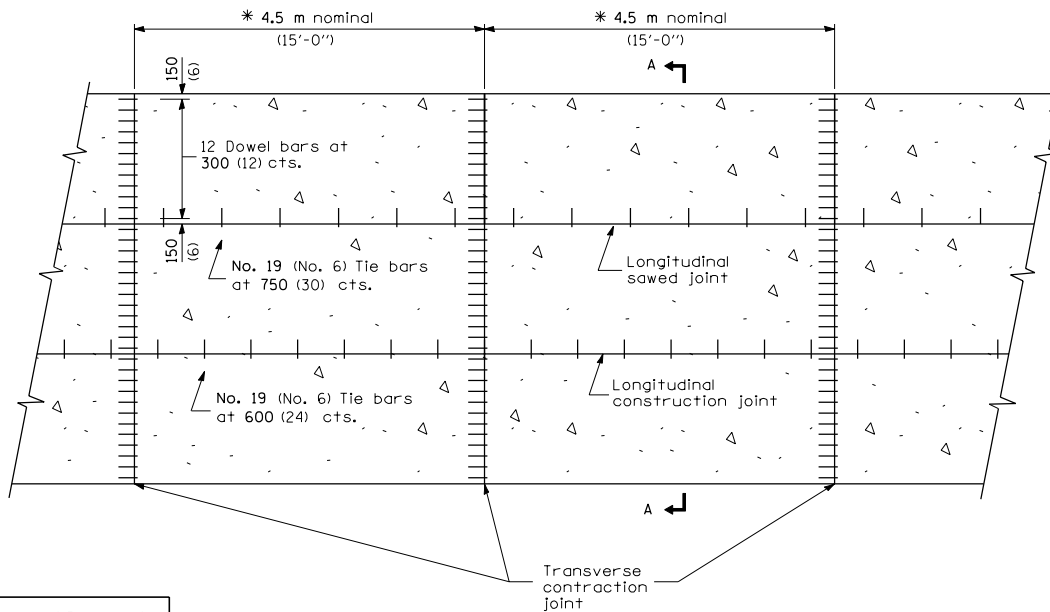


PLAN

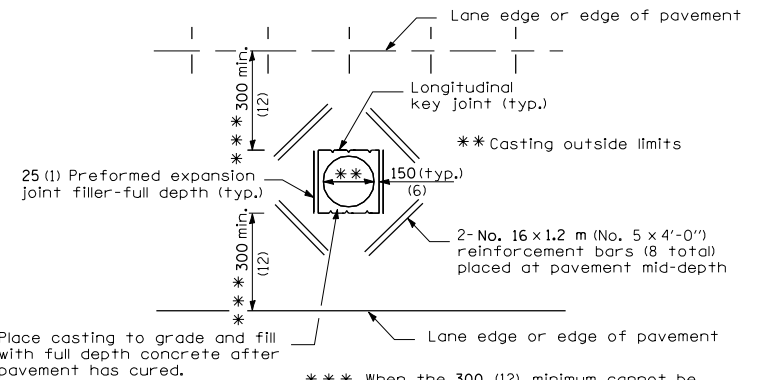

Place casting to grade and fill with full depth concrete after pavement has cured.

*** When the 300 (12) minimum cannot be achieved, the transverse joints shall be extended to either the longitudinal joint or edge of pavement.

**DETAIL OF ADDED REINFORCEMENT
FOR PAVEMENT BLOCK-OUTS**

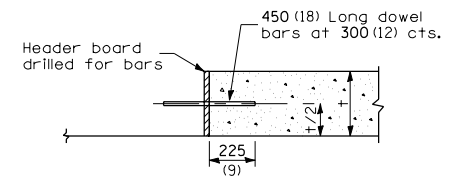

TRANSVERSE CONSTRUCTION JOINT

GENERAL NOTES

See Standard 420001 for details of joints not shown.

All dimensions are in millimeters (inches) unless otherwise shown.

DATE	REVISIONS
1-1-04	Minor corrections of joint information.
1-1-98	Del. Hinge Joints.

**10.8 m (36') JOINTED
PCC PAVEMENT**

STANDARD 420106-02